





Pin headers SL 3.81/90G

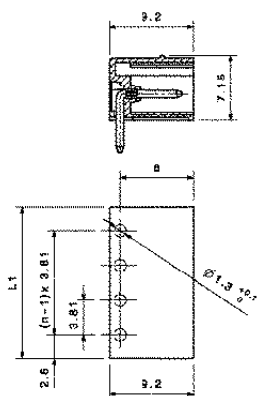

Technical data		VDE	UL	CSA
Rated voltage	V	125*	300	300
Rated current	A	8	8	5
Clamping range max.	mm ² /AWG	—	—	—

*Overvoltage category III / Pollution severity 3

Pin headers SL3.81/90F

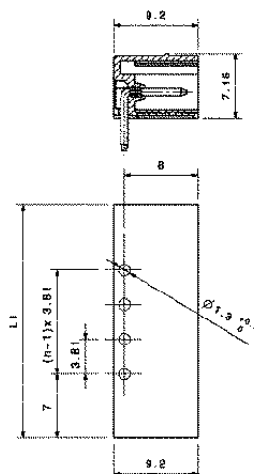

Technical data		VDE	UL	CSA
Rated voltage	V	125*	300	300
Rated current	A	8	8	5
Clamping range max.	mm ² /AWG	—	—	—

*Overvoltage category III / Pollution severity 3

Soldering pin length 3.5 mm

Color		black	green	
Poles	Type	Part No.	Part No.	Qty.
2	SL3.81/2/90G	1793130000	1793240000	50
3	SL3.81/3/90G	1793140000	1793250000	50
4	SL3.81/4/90G	1793150000	1793260000	50
5	SL3.81/5/90G	1793160000	1793270000	50
6	SL3.81/6/90G	1793170000	1793280000	50
8	SL3.81/8/90G	1793180000	1793290000	50
10	SL3.81/10/90G	1793190000	1793300000	50
12	SL3.81/12/90G	1793200000	1793310000	50
16	SL3.81/16/90G	1793210000	1793320000	50

Additional pole numbers on request. Minimum order quantities may apply.

Accessories

Direct printing	on request
Coding element	on request

Soldering pin length 3.5 mm

Color		black	green	
Poles	Type	Part No.	Part No.	Qty.
2	SL3.81/2/90F	1793330000	1793420000	50
3	SL3.81/3/90F	1793340000	1793430000	50
4	SL3.81/4/90F	1793350000	1793440000	50
5	SL3.81/5/90F	1793360000	1793450000	50
6	SL3.81/6/90F	1793370000	1793460000	50
8	SL3.81/8/90F	1793380000	1793470000	50
10	SL3.81/10/90F	1793390000	1793480000	50
12	SL3.81/12/90F	1793400000	1793490000	50
16	SL3.81/16/90F	1793410000	1793500000	50

Additional pole numbers on request. Minimum order quantities may apply.

Accessories

Direct printing	on request
Coding element	on request