



Pin headers SL 3.81/180G

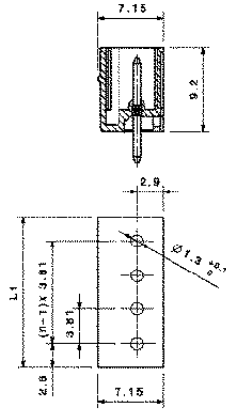

Pin headers SL 3.81/180F

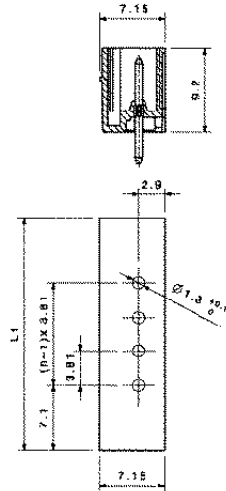

Technical data		VDE	UL	CSA
Rated voltage	V	125*	300	300
Rated current	A	8	8	5
Clamping range max.	mm ² /AWG	–	–	–

*Overvoltage category III / Pollution severity 3

Technical data		VDE	UL	CSA
Rated voltage	V	125*	300	300
Rated current	A	8	8	5
Clamping range max.	mm ² /AWG	–	–	–

*Overvoltage category III / Pollution severity 3

Soldering pin length 3.5 mm

Color		black	green	
Poles	Type	Part No.	Part No.	Qty.
2	SL3.81/2/180G	1793520000	1793610000	50
3	SL3.81/3/180G	1793530000	1793620000	50
4	SL3.81/4/180G	1793540000	1793630000	50
5	SL3.81/5/180G	1793550000	1793640000	50
6	SL3.81/6/180G	1793560000	1793650000	50
8	SL3.81/8/180G	1793570000	1793660000	50
10	SL3.81/10/180G	1793580000	1793670000	50
12	SL3.81/12/180G	1793590000	1793680000	50
16	SL3.81/16/180G	1793600000	1793690000	50

Additional pole numbers on request. Minimum order quantities may apply.

Accessories

Direct printing	on request
Coding element	on request

Soldering pin length 3.5 mm

Color		black	green	
Poles	Type	Part No.	Part No.	Qty.
2	SL3.81/2/180F	1793700000	1793790000	50
3	SL3.81/3/180F	1793710000	1793800000	50
4	SL3.81/4/180F	1793720000	1793810000	50
5	SL3.81/5/180F	1793730000	1793820000	50
6	SL3.81/6/180F	1793740000	1793830000	50
8	SL3.81/8/180F	1793750000	1793840000	50
10	SL3.81/10/180F	1793760000	1793850000	50
12	SL3.81/12/180F	1793770000	1793860000	50
16	SL3.81/16/180F	1793780000	1793870000	50

Additional pole numbers on request. Minimum order quantities may apply.

Accessories

Direct printing	on request
Coding element	on request