


For Rail Mounting




At Weidmüller, we are specialists for connector systems that are used in switchgear cabinets due to our wide selection of mounting rail solutions:

- Our connectors are installed on the mounting rails by using snap-on feet.
- The selection of the snap-on foot depends on the mounting rail type used (see table).

- Finger safety or back hand safety (according to VDE 0106) can be achieved on the mounting rail. Depending on which safety level is required, various connection technologies can be selected.
- The selection of the plug-in connector element offers a free choice of connection methods (e.g. screw or tension clamp).

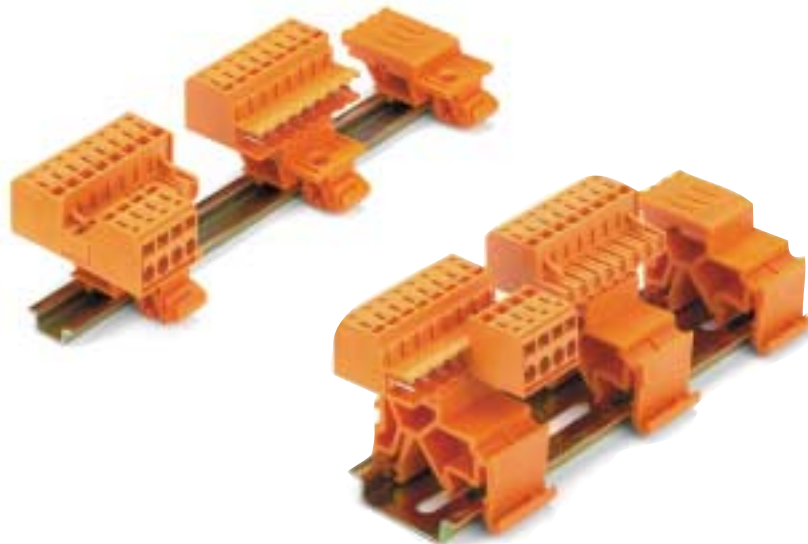

Pin plugs SLS 5.08T



Technical data	VDE	UL	CSA
Rated voltage (V)	250*	300	300
Rated current (A)	12	15	14
Wire size (mm ² /AWG)	2.5	28...12	28...12

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 223

		Part No. snap-on foot for TS 15	Part No. snap-on foot for TS 32/TS 35	Description on page
Omnimate Range	finger safety BLZF 5.08 	176008	176007	126
	BLIDC 5.08 	176008	176007	127
	back hand safety SLZF 5.08 	176008	176007	134-135
	SLS 5.08T 	157173	157646	172-173
	SLAS 5.08 	157173	157646	173

Color

Poles	Type	Part No.	Part No.	Qty.
2	—	—	—	—
3	—	—	—	—
4	SLS 5.08/4T	1627390000	1645460000	100
5	SLS 5.08/5T	1627400000	1645470000	50
6	SLS 5.08/6T	1627410000	1645480000	50
7	SLS 5.08/7T	1627420000	1645490000	50
8	SLS 5.08/8T	1627430000	1645500000	50
9	SLS 5.08/9T	1627440000	1645510000	50
10	SLS 5.08/10T	1627450000	1645520000	50
11	SLS 5.08/11T	1627460000	1645530000	50
12	SLS 5.08/12T	1627470000	1645540000	50
13	SLS 5.08/13T	1627480000	1645550000	50
14	SLS 5.08/14T	1627490000	1645560000	50
15	SLS 5.08/15T	1627500000	1645570000	50
16	SLS 5.08/16T	1627510000	1645580000	50
17	SLS 5.08/17T	1627520000	1645590000	20
18	SLS 5.08/18T	1627530000	1645600000	20
19	SLS 5.08/19T	1627540000	1645610000	20
20	SLS 5.08/20T	1627550000	1645620000	20
21	SLS 5.08/21T	1627560000	1645630000	20
22	SLS 5.08/22T	1627570000	1645640000	20
23	SLS 5.08/23T	1627580000	1645650000	20
24	SLS 5.08/24T	1627590000	1645660000	20

Accessories	Page
Mounting	—
Marking	180
Coding	182, 183
Miscellaneous	189, 190

Two snap-on feet must be used for connectors of 9 poles or more.

The BLZ 5.08 may be supplied for mounting rail installation (on request).