



Omnimate Range - 3.50 mm Pitch

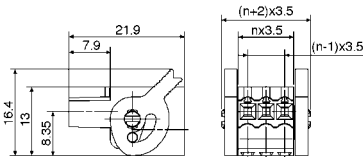

Socket blocks BLZF 3.5 LH*



Technical data	VDE	UL	CSA
Rated voltage (V)	125*	300	300
Rated current (A)	10	10	10
Wire size (mm ² /AWG)	1.5	26...14	26...14

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 213

Color



Poles	Type	Part No. ¹⁾	Part No. ²⁾	Qty.
2	BLZF 3.5/2LH	1691570000	1691800000	100
3	BLZF 3.5/3LH	1691580000	1691810000	100
4	BLZF 3.5/4LH	1691590000	1691820000	100
5	BLZF 3.5/5LH	1691600000	1691830000	50
6	BLZF 3.5/6LH	1691610000	1691840000	50
7	BLZF 3.5/7LH	1691620000	1691850000	50
8	BLZF 3.5/8LH	1691630000	1691860000	50
9	BLZF 3.5/9LH	1691640000	1691870000	50
10	BLZF 3.5/10LH	1691650000	1691880000	50
11	BLZF 3.5/11LH	1691660000	1691890000	50
12	BLZF 3.5/12LH	1691670000	1691900000	50
13	BLZF 3.5/13LH	1691680000	1691910000	50
14	BLZF 3.5/14LH	1691690000	1691920000	50
15	BLZF 3.5/15LH	1691700000	1691930000	50
16	BLZF 3.5/16LH	1691710000	1691940000	50
17	BLZF 3.5/17LH	1691720000	1691950000	20
18	BLZF 3.5/18LH	1691730000	1691960000	20
19	BLZF 3.5/19LH	1691740000	1691970000	20
20	BLZF 3.5/20LH	1691750000	1691980000	20
21	BLZF 3.5/21LH	1691760000	1691990000	20
22	BLZF 3.5/22LH	1691770000	1692000000	20
23	BLZF 3.5/23LH	1691780000	1692010000	20
24	BLZF 3.5/24LH	1691790000	1692020000	20

¹⁾ release lever in black ²⁾ release lever in orange

* Use with SL 3.5F flange version

Accessories	Page
Mounting	—
Marking	190
Coding	193
Miscellaneous	195-201