LP 7.62/180

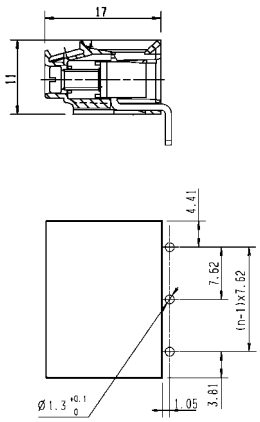

Technical data	VDE	UL	CSA
Rated voltage (V)	500*	300	300
Rated current (A)	26	15	20
Wire size (mm²/AWG)	4.0	26…12	26…12

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 59

Solder pin length 4.5 mm 4.5 mm

Color

Poles	Type	Part No.	Part No.	Qty.
2	LP 7.62/2/180	**1753930000**	**1753910000**	100
3	LP 7.62/3/180	**1753940000**	**1753920000**	100

Accessories	Page
Marking	40
Mounting	46
Miscellaneous	46

TOP 1.5GS 7.62/90

modular construction



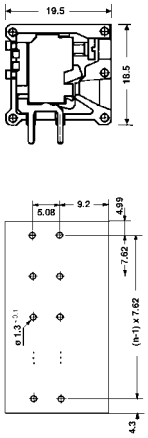

Technical data	VDE	UL	CSA
Rated voltage (V)	500*	300	300
Rated current (A)	16	10	10
Wire size (mm²/AWG)	1.5	22…14	14

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 57

Solder pin length 3.5 mm

Color

Poles	Type	Part No.	Qty.
2	TOP 1.5GS 7.62/2/90	**0393360000**	100
3	TOP 1.5GS 7.62/3/90	**1726210000**	100
4	TOP 1.5GS 7.62/4/90	**1576330000**	50
5	TOP 1.5GS 7.62/5/90	**1647320000**	25
6	TOP 1.5GS 7.62/6/90	**1683990000**	20
7	TOP 1.5GS 7.62/7/90	**1647310000**	20
8	TOP 1.5GS 7.62/8/90	**0642460000**	20
10	TOP 1.5GS 7.62/10/90	**0642560000**	20

Accessories	Page
Marking	42
Mounting	-
Miscellaneous	45

TOP 1.5GS 7.62/180

modular construction



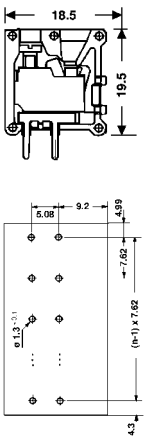

Technical data	VDE	UL	CSA
Rated voltage (V)	500*	300	300
Rated current (A)	16	10	10
Wire size (mm²/AWG)	1.5	22…14	14

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 57

Solder pin length 4.5 mm

Color

Poles	Type	Part No.	Qty.
2	TOP 1.5GS 7.62/2/180	**0391360000**	100
3	TOP 1.5GS 7.62/3/180	**0391460000**	50
4	TOP 1.5GS 7.62/4/180	**0391560000**	50
5	TOP 1.5GS 7.62/5/180	**1490460000**	25
6	TOP 1.5GS 7.62/6/180	**1597060000**	20
7	TOP 1.5GS 7.62/7/180	**1597070000**	20
8	TOP 1.5GS 7.62/8/180	**0570960000**	20
10	TOP 1.5GS 7.62/10/180	**0571160000**	20

Accessories	Page
Marking	42
Mounting	-
Miscellaneous	45