




TOP 4GS 7.62/90

TOP 4GS 7.62/180

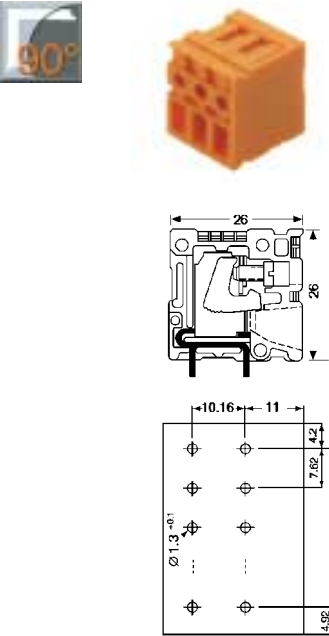


Technical data	VDE	UL	CSA
Rated voltage (V)	500*	300	300
Rated current (A)	36	30	25
Wire size (mm ² /AWG)	6.0	22...10	10

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 63

Solder pin length		3.5 mm	3.5 mm		
Color					
Poles	Type	Part No.	Part No.	Qty.	
2	TOP 4GS 7.62/2/90	0289660000	1751780000	50	
3	TOP 4GS 7.62/3/90	0289760000	1786460000	50	
4	TOP 4GS 7.62/4/90	0290160000	1750680000	50	
5	TOP 4GS 7.62/5/90	1698740000	1786470000	50	
6	TOP 4GS 7.62/6/90	1786410000	1751790000	50	
7	TOP 4GS 7.62/7/90	1647300000	1786480000	50	
8	TOP 4GS 7.62/8/90	1786420000	1786490000	50	
9	TOP 4GS 7.62/9/90	1786430000	1786500000	50	
10	TOP 4GS 7.62/10/90	1786440000	1786510000	50	
11	TOP 4GS 7.62/11/90	1759860000	1786520000	50	
12	TOP 4GS 7.62/12/90	1786450000	1786530000	50	

Accessories	Page
Marking	41
Mounting	-
Miscellaneous	45

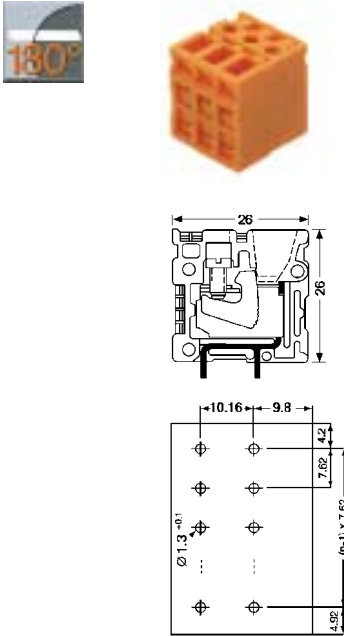

Technical data	VDE	UL	CSA
Rated voltage (V)	500*	300	300
Rated current (A)	36	30	25
Wire size (mm ² /AWG)	6.0	22...10	10

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 63

Solder pin length		3.5 mm	3.5 mm		
Color					
Poles	Type	Part No.	Part No.	Qty.	
2	TOP 4GS 7.62/2/180	0298360000	1786590000	50	
3	TOP 4GS 7.62/3/180	0298460000	1786600000	50	
4	TOP 4GS 7.62/4/180	0298560000	1786610000	50	
5	TOP 4GS 7.62/5/180	1786540000	1786620000	50	
6	TOP 4GS 7.62/6/180	1494560000	1786630000	50	
7	TOP 4GS 7.62/7/180	1786550000	1786640000	50	
8	TOP 4GS 7.62/8/180	1786560000	1786650000	50	
9	TOP 4GS 7.62/9/180	1571700000	1786660000	50	
10	TOP 4GS 7.62/10/180	1786570000	1786670000	50	
11	TOP 4GS 7.62/11/180	1786580000	1786680000	50	
12	TOP 4GS 7.62/12/180	1749170000	1786690000	50	

Accessories	Page
Marking	41
Mounting	-
Miscellaneous	45