



# Ground Terminals

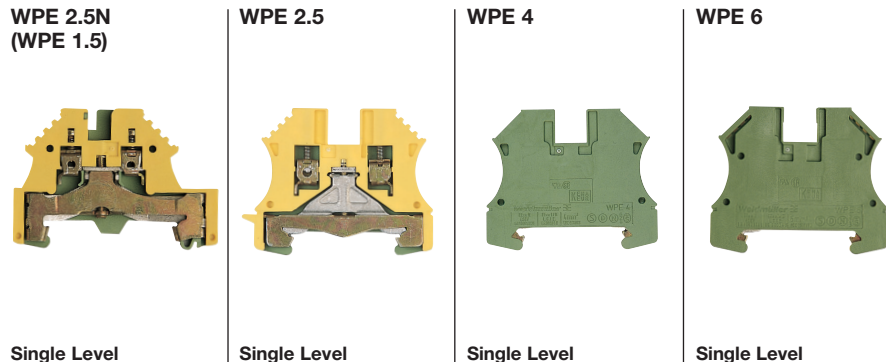

Terminal Block Selection Data		WPE 2.5N (WPE 1.5)	WPE 2.5	WPE 4	WPE 6
Available Options	Version	Part No.	Part No.	Part No.	Part No.
	Green/yellow Wemid	1016200000	1010000000	1010100000	1010200000
	Yellow/green Wemid				
Dimensions					
Width / Length / Height mm (in.)	for TS 35 x 7.5	5/54/37.5 (.20/2.13/1.48)	5/6 /47 (.197/2.36/1.85)	6/60/47 (.24/2.36/1.85)	8/60/47 (.31/2.36/1.85)
Insulation stripping length	mm (in.)	10 (.39)	10 (.39)	10 (.39)	12 (.47)
Technical Data					
Rated voltage / rated current / wire size	UL	- / - / #22...14 AWG	- / - / #22...12 AWG	- / - / #22...10 AWG	- / - / #20...8 AWG
	VDE	- / - / 1.5 mm <sup>2</sup>	- / - / 2.5 mm <sup>2</sup>	- / - / 4 mm <sup>2</sup>	- / - / 6 mm <sup>2</sup>
Torque	Nm (lb. in.)	0.5 (4.5)	0.8 (7.1)	1.0 (9.0)	1.6 (14.2)
Clamping screw	M	2.5	2.5	3	3.5
Selected Accessory Data <sup>††</sup>					
End Plate (WAP) (thickness mm)	WAP	Type Part No.	Type Part No.	Type Part No.	Type Part No.
		WAP-WDU (1.5) 1060000000	WAP (1.5) 1050000000		
Support Block*		SH 2 0494920000	SH 2 0494920000	SH 2 0494920000	SH 2 0494920000
Tools	Screwdriver	SD 9008330000	SD 9008330000	SD 9008330000	SD 9008340000
Marking Tags	Print				
		DEK 5/5 0473460001	DEK 5/5 0473460001	DEK 5/6 0468660001	DEK 5/6.5 0468160001
		DEK 5/5 0473560001	DEK 5/5 0473560001	DEK 5/6 0468760001	DEK 5/6.5 0468260001

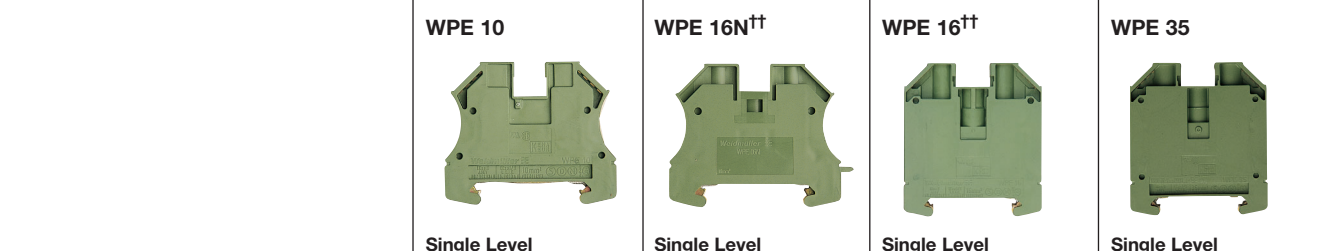

Terminal Block Selection Data		WPE 10	WPE 16N <sup>††</sup>	WPE 16 <sup>††</sup>	WPE 35
Available Options	Version	Part No.	Part No.	Part No.	Part No.
	Green/Yellow Wemid	1010300000	1019100000 <sup>‡</sup>	1010400000	1010500000
	Green/Yellow Wemid with hex socket				1012600000
	Yellow/Green Wemid				
Dimensions					
Width / Length / Height mm (in.)	for TS 35 x 7.5	10/60/47 (.39/2.36/1.85)	12/60/47 (.47/2.36/1.85)	12/60/63 (.47/2.36/2.48)	16/60/63 (.63/2.36/2.48)
Insulation stripping length	mm (in.)	12 (.47)	16 (.63)	16 (.63)	18 (.71)
Technical Data					
Rated voltage / rated current / wire size	UL	- / - / #16...8 AWG	- / - / #14...6 AWG	- / - / #14...6 AWG	- / - / #12...2 AWG
	VDE	- / - / 10 mm <sup>2</sup>	- / - / 16 mm <sup>2</sup>	- / - / 16 mm <sup>2</sup>	- / - / 35 mm <sup>2</sup>
Torque	Nm (lb. in.)	2.3 (20.4)	2.3 (20.4)	4.0 (35.0)	5.8 (51.0)
Clamping screw	M	4	4	5	6
Selected Accessory Data <sup>††</sup>					
End Plate (WAP) (thickness mm)	Green Wemid	Type Part No.	Type Part No.	Type Part No.	Type Part No.
		SH 2 0494920000	SH 2 0494920000	SH 2 0494920000	SH 2 0494920000
Support Block*					
Tools	Screwdriver	SD 9008350000	SD 9008350000	SD 9008350000	SD 9008350000
	Hexagon socket screw key				Hex key (4 mm) 0485100000
Link		WQB-PEN 10 1060300000	WQV 16N-PEN 1071360000 <sup>‡</sup>	WQB-PEN 16 1060200000	WQB-PEN 16 1060200000
Marking Tags	Print				
		DEK 5/5 0473460001	DEK 5/5 0473460001	DEK 5/5 0473460001	DEK 5/5 0473460001
		DEK 5/5 0473560001	DEK 5/5 0473560001	DEK 5/5 0473560001	DEK 5/5 0473560001

Note: Part numbers shown are for a single Consecutive horizontal card of pre-printed tags numbered 1-50. For additional information, see Accessories section. Consecutive vertical

<sup>\*</sup>For insulating mounting rails from the back panel in totally isolated systems.

<sup>‡</sup>Yellow side open and can only be set in row to closed terminal side.

<sup>††</sup>Note: WPE 16 N has same electrical specifications as WPE 16, but is smaller with same profile as WPE 2.5 to 10.

<sup>‡‡</sup>See Accessories section for additional information.