


KE12

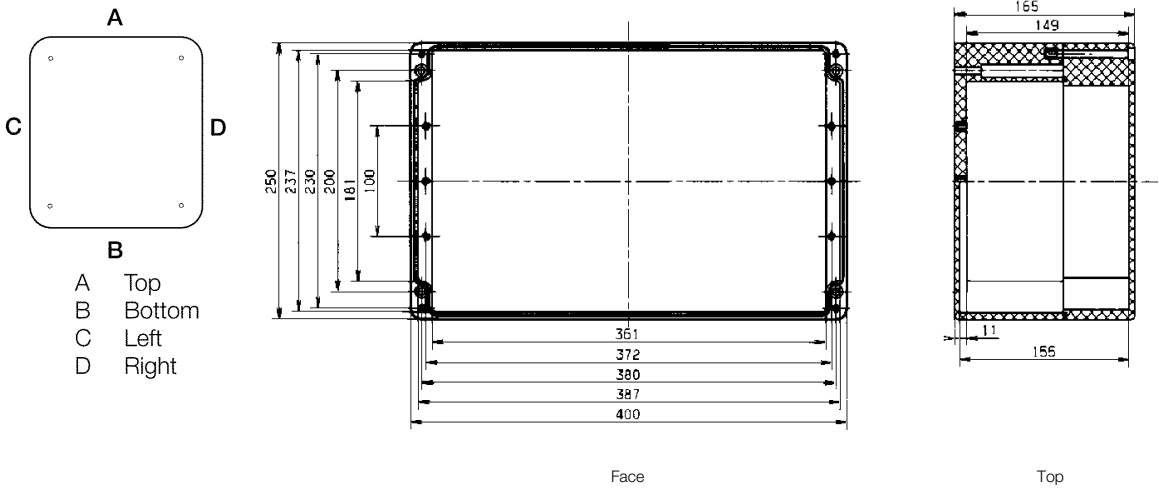

KE12

Height	250 mm
Width	400 mm
Depth	165 mm
Weight	5.056 kg

Guide to Gland Entries	Sides A or B	Sides C or D
No. of maximum entries per plate	M16 33	12
	M20 15	6
	M25 11	4
	M32 6	3
	M40 5	2
	M50 4	2
	M63 -	-
	M75 -	-

Terminal Selection Guide (Maximum Physical Content*)	Type	Width (mm)	Vertical	Horizontal
Mounting Rail TS35	WDU 1.5	5	-	2x70
	WDU 2.5	5	-	2x70
	WDU 4	6	-	1x58
	WDU 6	8	-	1x44
	WDU 10	10	-	1x35
	WDU 16	12	-	1x29
	ZDU 2.5	5	-	2x70
	ZDU 4	6	-	1x58
	ZDU 6	8	-	1x44
	SAK 2.5	6	-	2x58
Mounting Rail TS32	SAK 4	6.5	-	2x54
	SAK 6N	8	-	2x44
	SAK 10	10	-	2x35
	AKZ 2.5	5	-	2x70
Mounting Rail TS15	AKZ 4	6	-	2x58

***Important Note for Increased Safety Applications**

Terminal count may be further limited due to restrictions based on current and/or wire size.
Click on "Terminal Content Guide" button
to determine if terminal count is further reduced.