


Universal In-Line Fuseholder

For 1/4" X 7/8" to 1-1/4" Fuses

HRK

Dimensional Data

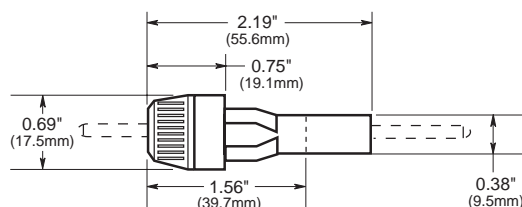

- Three springs furnished with fuseholder afford acceptance of 1/4" fuses of different lengths.
- Wire leads are staked and soldered to the contacts of the fuseholder.
- Leads are 8" (20.3mm) long.
- Wire size - #14.

CATALOG SYMBOL: HRK
 UNIVERSAL IN-LINE FUSEHOLDER
 15 AMPERE
 32 VOLTS AC
 NO AGENCY LISTING

Electrical Ratings for HRK Fuseholder

Catalog Symbol	Amps	Volts AC	Fuse Description
HRK	15	32	1/4" diameter fuses of different lengths.

Carton Quantity and Weight

Ampere Ratings	Carton Qty	Weight	
		Lbs.	Kg.
15	100	5	2.27

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.