

Accessories

SOLDER TERMINAL LUGS: ST & 3/4ST TYPES

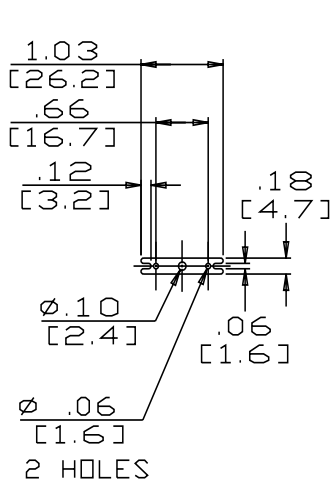


Fig 1

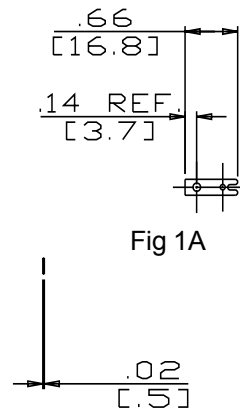


Fig 1A

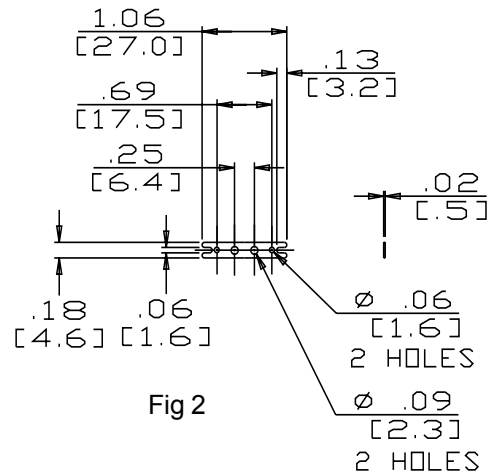


Fig 2




Fig 2A

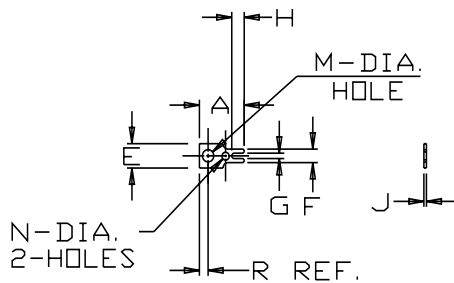


Fig 3

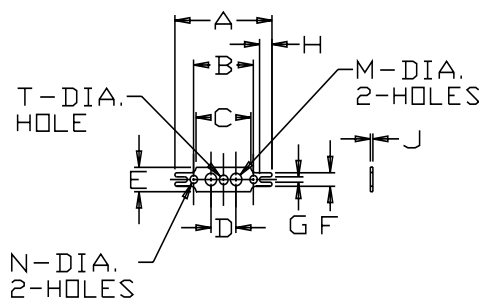


Fig 4




Fig 4A

	Figure	A	B	C	D	E	F	G	H	J	M	N	R	T	ALSO USED ON
411ST	FIGURE 1														
411-3/4ST	FIGURE 1A														
410ST	FIGURE 2														
410-3/4ST	FIGURE 2A														
599-3/4ST	FIG 3	0.56	--	--	--	0.28	0.16	0.06	0.16	0.032	0.144	0.093	0.11	--	2590, 2590A
600ST	FIG 4	1.22	0.75	0.69	0.31	0.28	0.16	0.06	0.16	0.032	0.144	0.093	--	--	600A, 670A
600-3/4ST	FIG 4A	0.92	--	--	0.31	0.28	0.16	0.06	0.16	0.032	0.144	0.093	0.15	--	200 HB, 621RZ
601ST	FIG 4	1.58	0.94	0.84	0.42	0.31	0.21	0.06	0.21	0.036	0.148	0.125	--	--	672
601-3/4ST	FIG 4A	1.17	--	--	0.42	0.31	0.21	0.06	0.21	0.036	0.148	0.125	0.17	--	1690, 2690
602ST	FIG 4	1.85	1.06	0.94	0.50	0.41	0.28	0.09	0.28	0.036	0.177	0.125	--	--	672
602-3/4ST	FIG 4A	1.37	--	--	0.50	0.41	0.28	0.09	0.28	0.036	0.177	0.125	0.20	--	1690, 2690
699-3/4ST	FIG 3	0.70	--	--	--	0.31	0.21	0.06	0.21	0.032	0.146	0.125	0.13	--	1690, 2690
812-3/4ST	FIG 3	0.88	--	--	--	0.41	0.28	0.09	0.28	0.037	0.177	0.125	0.19	--	

MM=Dim X 25.4


ST = (S)

3/4 ST = (HS)

Accessories

Solder Terminal Lugs: Y, YSY & Z Types

Material: Brass Finish: Electro-Tin Plated



Style "Y"
"YSY"

Figure 1





Figure 2
Same as Fig 1 except as shown



Figure 3
Same as Fig 1 except as shown

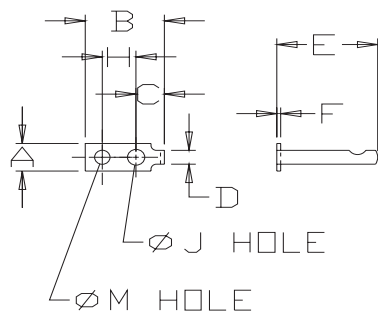

Style "Z"

Figure 4



Figure 5
Same as Fig 4 except as shown


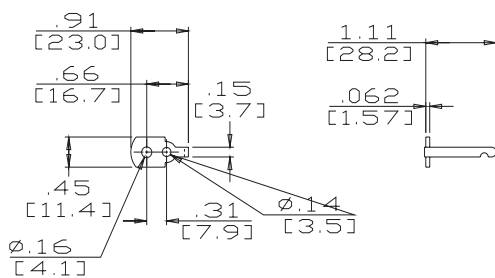


Figure 6

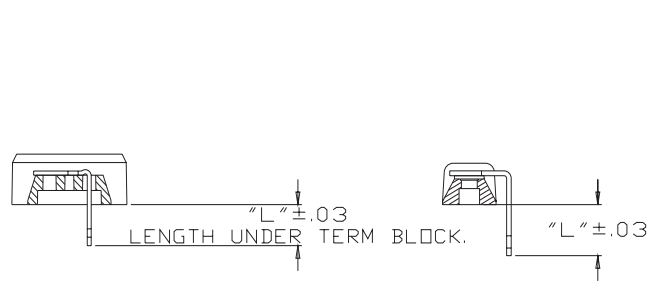

Style "Y"
"YSY"
"XY"

Detail R

Style "Z"

Note: For Factory Assembly only on to 603 Terminal Boards

CATALOG#	FIGURE	A	B	C	D	E	F	H	J	M	L (see detail R)	also used on
599Z & 600Y	FIG 3	0.28	0.48	0.33	0.085	0.63	0.036	NA	0.144	NA	599Z=0.31, 600Y=0.31	670ARZ
600YSY	FIG 3					0.82	0.036				0.50	670ARZ
600Z	FIG 4		0.73	0.25	0.140	0.94		0.31	0.160	0.143	0.62	670ARZ
699Z & 601Y	FIG 1	0.31	0.63	0.44	0.099	0.80	0.036	NA	0.148	NA	699Z=0.42, 601Y=0.42	
601YSY	FIG 2					1.07					0.69	
602Y	FIG 1	0.43	0.75	0.52	0.125	0.95					0.49	
812Z & 602YSY	FIG 2	0.40	0.70	0.52		1.13	0.040		0.177		812Z=0.64, 602YSY=0.67	
602Z	FIG 5		1.09	0.38	0.203	1.06		0.50			0.60	
603Y	FIGURE 6 Note: for factory assembly only to 603 terminal block										0.60	