



Screw Clamp 35 mm DIN-Rail Terminals


Pluggable Feed Through Terminals
for BLA Connectors



WDU 1.5/BLA




WDU 1.5/LD/BLA with red LED



WDU 1.5/R/BLA

Negative return
conductor
in blue

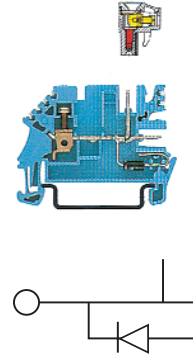

Available Options	Version	Type	Type	Type
	Beige Wemid	1577260000		
	Blue Wemid			Blue 1577310000
	Beige Wemid with red LED		12 VDC 1577270000	
	Beige Wemid with red LED		24 VDC 1577280000	
Dimensions				
Width / Length / Height mm (in.)	with TS 35 x 7.5	5/45.4/57.5*/45.0/55.5*	5/45.4/57.5*/45.0/55.5*	5/45.4/57.5*/45.0/55.5*
Insulation stripping length	mm (in.)	10 (.39)	10 (.39)	10 (.39)
Technical Data				
Rated voltage / rated current / wire size	UL	300 V / 20 A / #22...12 AWG	300 V / 20 A / #22...12 AWG	300 V / 20 A / #22...12 AWG
	CSA	300 V / 10 A / #26...12 AWG	12...110 V / 10 A / #26...12 AWG	- / - / #26...12 AWG
	VDE	250 V / 10 (2 x 8) A / 1.5 mm ²	10 (2 x 8) A / 1.5 mm ²	1.5 mm ²
Torque	Nm (lb. in.)	0.5 (4.5)	0.5 (4.5)	0.5 (4.5)
Clamping screw	M	2.5	2.5	2.5
End Plate / Locking Bracket**				
	WAP (thickness 2.5 mm)	Type Part No. With pin 1577320000 Without pin 1577330000	Type Part No. With pin 1577320000 Without pin 1577330000	Type Part No. With pin 1577320000 Without pin 1577330000
	WBB Orange (thickness 5 mm)	Type Part No. With pin 1068260000 Without pin 1068160000	Type Part No. With pin 1068260000 Without pin 1068160000	Type Part No. With pin 1068260000 Without pin 1068160000
Jumpers				
WQV	Note: Final number in model indicates no. of poles (e.g. WQV 2.5/2 = 2 poles). For additional information, see Accessories section.	WQV 2.5/2 1053660000 WQV 2.5/3 1063760000 WQV 2.5/4 1053860000 WQV 2.5/10 1054460000	WQV 2.5/2 1053660000 WQV 2.5/3 1053760000 WQV 2.5/4 1053860000 WQV 2.5/10 1054460000	WQV 2.5/2 1053660000 WQV 2.5/3 1053760000 WQV 2.5/4 1053860000 WQV 2.5/10 1054460000
	Notching tool WAW 1 for WQV	WAW 1 9004500000	WAW 1 9004500000	WAW 1 9004500000
Negative Conductor-Busbar				
0.5 x 4 x 120 mm			ML-SSch 1063200000	ML-SSch 1063200000
Unassigned Pin Covers				
		WAD 5/2 1577400000	WAD 5/2 1577400000	WAD 5/2 1577400000
Keying				
		SLA-KO 1323560000	SLA-KO 1323560000	SLA-KO 1323560000
Plugs				
	No. Poles	4 BLA 4 1281960000	4 BLA 4 1281960000	4 BLA 4 1281960000
		6 BLA 6 1282160000	6 BLA 6 1282160000	6 BLA 6 1282160000
		8 BLA 8 1282360000	8 BLA 8 1282360000	8 BLA 8 1282360000
	With lateral	4 BLA 4 B 1356260000	4 BLA 4 B 1356260000	4 BLA 4 B 1356260000
	Dovetail	6 BLA 6 B 1356460000	6 BLA 6 B 1356460000	6 BLA 6 B 1356460000
	Guide	8 BLA 8 B 1356660000	8 BLA 8 B 1356660000	8 BLA 8 B 1356660000
	Locking block	BB 12 R 1593450000	BB 12 R 1593450000	BB 12 R 1593450000
Marking tags				
	Print	DEK 5/5 0473460001	DEK 5/5 0473460001	DEK 5/5 0473460001
	Consecutive horizontal	DEK 5/5 0473560001	DEK 5/5 0473560001	DEK 5/5 0473560001
	Consecutive vertical	DEK 5/5 0473560001	DEK 5/5 0473560001	DEK 5/5 0473560001

See Accessories section for mounting rails, end brackets, additional marking material and accessories.

*With BLA

**Set for screwing the connector to the terminal strip. Pins allow blocks to fit together as an assembly. Use pin version on closed side of block and without pins on open side.