


Rectangular Connectors MC Series

4 CONTACT MODULES

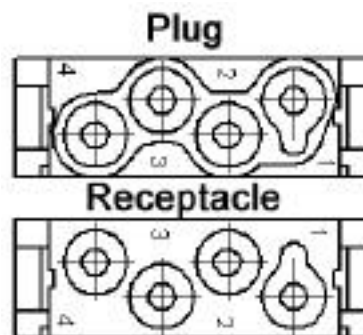

Plug	Receptacle	Rated Voltage	Rated Current
10.3990	10.3991	630V	25A

Contacts Sold Separately

MACHINED CONTACTS: DIAMETER 2.5MM



Bags of 100						
mm ²	AWG	Silver		Gold		Stripping Length
		Pin	Socket	Pin	Socket	
0.5	20	11.1900	11.1950	11.1920	11.1970	Pin=7.4, Socket =7.3
0.75 - 1.0	18	11.1901	11.1951	11.1921	11.1971	Pin=7.4, Socket =7.3
1.5	16	11.1902	11.1952	11.1922	11.1972	Pin=7.4, Socket =7.3
2.5	14	11.1903	11.1953	-	-	Pin=7.4, Socket =7.3
4.0	12	11.1904	11.1954	-	-	Pin=7.4, Socket =7.3

TOOLS

WIRE GAUGE: 0.5 - 4.0 MM²



Locator
11.1472



Crimp Dies
11.1471



Crimp Tool
11.1470



Removal Tool:
11.1825

www.contactelectronics.com
800-221-1451


Rectangular Connectors MC Series

4 + PE CONTACT HIGH VOLTAGE MODULES



Plug	Receptacle	Rated Voltage	Rated Current
10.3832	10.3833	1000V	16A

Contacts Sold Separately

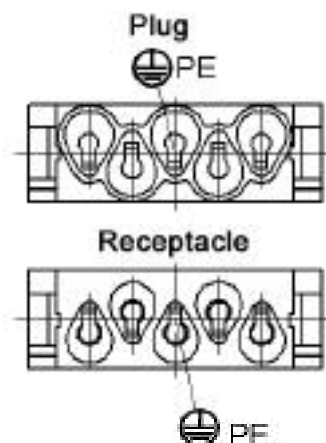

STAMPED & FORMED CONTACTS: DIAMETER 2.5MM



Reel feeds
from the left.

mm2	AWG	Bags of 100		Reels of 200		Stripping Length
		Silver		Silver		
		Pin	Socket	Pin	Socket	
0.5 - 1.5	16 - 20	11.2010	11.2050	11.2080	11.2090	3.5 - 0.5
1.5 - 2.5	16 - 14	11.2020	11.2060	11.2085	11.2095	3.5 - 0.5

TOOLS


WIRE GAUGE: 0.5 - 2.5MM2



Crimp Tool
11.1470



Locator
11.1473



Removal Tool:
11.1600




Crimp Tool for Reel:
11.1535



Crimp Dies
0.5 - 1.5: 11.14718
1.5 - 2.5: 11.14719

Crimp Dies for Reel:
0.5 - 1.5: 11.1537
1.5 - 2.5: 11.1538



www.contactelectronics.com
800-221-1451