

**EM3675 Series**  
**Euro-Mag Terminal Blocks**  
**5.00 Centers**

**SPECIFICATIONS**

Rating: 10A, 300V  
 Center Spacing: .197" (5.00)  
 Wire Size: #14-26 AWG  
 Housing Material: Polyamide 66 (UL94V-0) Green Polyamide Type 6/6 94VO  
 Contact Material: Tin Plated Brass  
 Screw Size: M 2x6, Nickel Plated Steel  
 Operating Temperature: 105°C (221°F) max., -40°C (-40°F) min.  
 Torque Rating: 4.0 in-lb.  
 Recommended PCB Hole Diameters: .055" (1.40)  
 Construction: Mold to Length  
 Agency Approvals: UL362622; CSA Pending; CE Certified


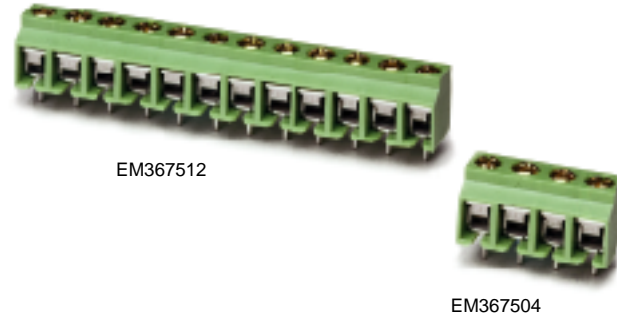


TABLE A

Poles	L (mm)	Poles	L (mm)
2	10.00	15	75.00
3	15.00	16	80.00
4	20.00	17	85.00
5	25.00	18	90.00
6	30.00	19	95.00
7	35.00	20	100.00
8	40.00	21	105.00
9	45.00	22	110.00
10	50.00	23	115.00
11	55.00	24	120.00
12	60.00	25	125.00
13	65.00	26	130.00
14	70.00	27	135.00

To convert to inches, divide by 25.4

EM3675 Series

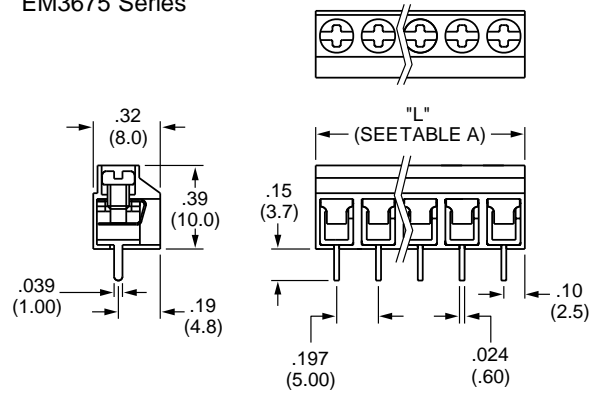

**Part Numbering System**

Series # of Poles  
**EM3675** **nn**  
 02 to 27