


Fuse Holders With BD (Box Distribution) Connectors

**30 and 60 Amp
250 and 600 Volt**

Specifications

Available on Class H, R, and J Holders
Connectors, High Conductive Aluminum, Tin Plated
UL Recognized File No. E35113
CSA Certified File No. LR21455
Reinforcing Member Available, Standard on Class R

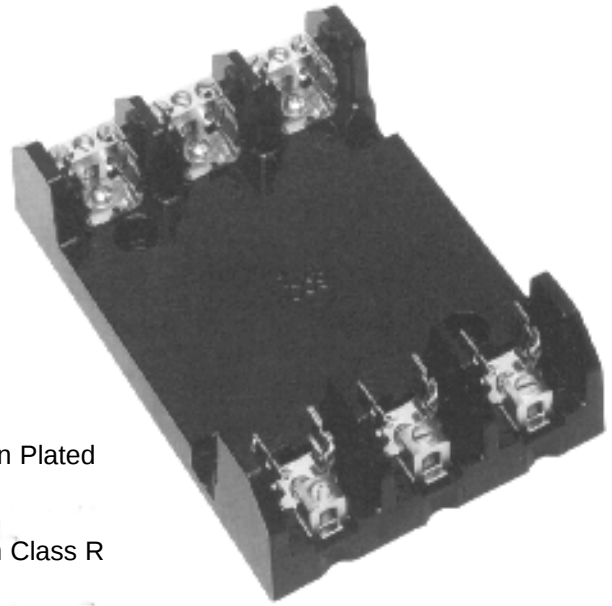

Class H Fuse Holders (For Class R Replace F With R in Catalog Number)

Catalog #	Volts	Amp	Line Wire Range	Load Wire Range
F60AXB	250	60	(1) #2-#10 AWG	(1) #2-#10 AWG (1) #6-#14 AWG
F60AXB-D	250	60	(1) #2-#10 AWG	(1) #2-#10 AWG (2) #6-#14 AWG
6F30AXB-D	600	30	(1) #6-#14 AWG	(1) #6-#14 AWG (2) #10-#18 AWG
6F60AXB	600	60	(1) #2-#10 AWG	(1) #2-#10 AWG (1) #6-#14 AWG
6F60AXB-D	600	60	(1) #2-#10 AWG	(1) #2-#10 AWG (2) #6-#14 AWG

Class J Fuse Holders

Catalog #	Volts	Amp	Line Wire Range	Load Wire Range
6J60AXB	600	60	(1) #2-#10 AWG	(1) #2-#10 AWG (1) #6-#14 AWG
6J60AXB-D	600	60	(1) #2-#10 AWG	(1) #2-#10 AWG (2) #6-#14 AWG

X -denotes number of poles