


37TB-Military Class (MIL-T-55164/1)

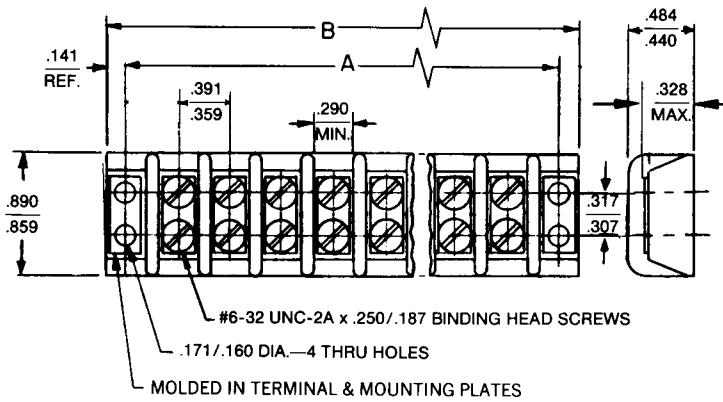

Molded Material:

Plastic: Grade F temperature rating 155 C per Mil-M-14

Screws: Brass per QQ-W-321, nickel plate per QQ-N-290

Terminal Plates: Brass per QQ-B-613, nickel plated per QQ-N-290

Electrical Rating:


Rated voltage (maximum): 300 volts

Current rating: 15 Amps

Dielectric withstanding voltage (D.W.V.): 3000 volts RMS

Military Type Designation	Dimension B	Dimension A
37TB02F	1.360-1.453	1.109-1.156
37TB03F	1.735-1.828	1.484-1.531
37TB04F	2.110-2.203	1.859-1.906
37TB05F	2.500-2.593	2.234-2.281
37TB06F	2.876-2.969	2.609-2.656
37TB07F	3.250-3.343	2.984-3.031
37TB08F	3.626-3.719	3.359-3.406
37TB09F	4.000-4.093	3.734-3.781
37TB10F	4.376-4.469	4.109-4.156
37TB11F	4.750-4.843	4.484-4.531
37TB12F	5.126-5.219	4.859-4.906
37TB13F	5.500-5.593	5.234-5.281
37TB14F	5.876-5.969	5.609-5.656
37TB15F	6.250-6.365	5.969-6.047
37TB16F	6.626-6.735	6.344-6.422
37TB17F	7.000-7.109	6.719-6.797
37TB18F	7.376-7.485	7.094-7.172
37TB19F	7.752-7.812	7.469-7.547
37TB20F	8.127-8.187	7.844-7.922
37TB21F	8.502-8.562	8.219-8.297
37TB22F	8.877-8.937	8.594-8.672
37TB23F	9.252-9.312	8.969-9.047
37TB24F	9.627-9.687	9.344-9.422
37TB25F	10.002-10.062	9.719-9.797
37TB26F	10.377-10.437	10.094-10.172
37TB27F	10.752-10.812	10.469-10.547
37TB28F	11.127-11.187	10.844-10.922
37TB29F	11.502-11.562	11.219-11.297
37TB30F	11.877-11.937	11.594-11.672
37TB31F	12.252-12.312	11.969-12.047

38TB-Military Class (MIL-T-55164/2)

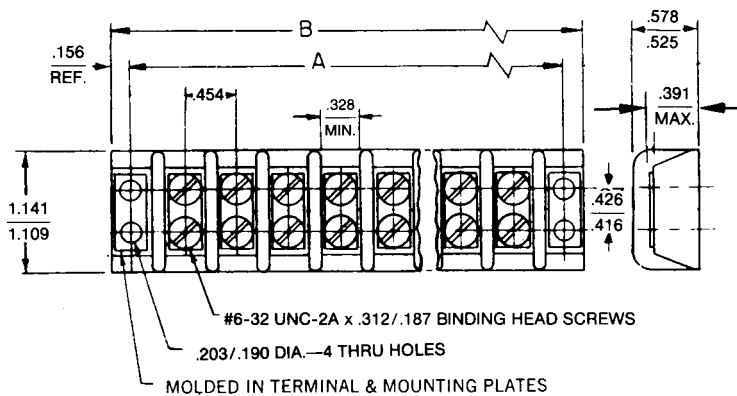

Molded Material:

Plastic: Grade F temperature rating 150 C per Mil-M-14

Screws: Brass per QQ-W-321, nickel plate per QQ-N-290

Terminal Plates: Brass per QQ-B-613, nickel plated per QQ-N-290

Electrical Rating:

Rated voltage (maximum): 600 volts

Current rating: 20 Amps

D.W.V.: 3400 volts RMS

Military Type Designation	Dimension B	Dimension A
38TB02F	1.579-1.672	1.296-1.343
38TB03F	2.016-2.109	1.734-1.781
38TB04F	2.454-2.547	2.172-2.219
38TB05F	2.891-2.984	2.609-2.656
38TB06F	3.329-3.422	3.046-3.093
38TB07F	3.766-3.859	3.484-3.531
38TB08F	4.204-4.297	3.937-3.984
38TB09F	4.641-4.734	4.375-4.422
38TB10F	5.079-5.172	4.812-4.859
38TB11F	5.532-5.625	5.250-5.297
38TB12F	5.969-6.078	5.687-5.734
38TB13F	6.407-6.516	6.110-6.188
38TB14F	6.844-6.953	6.547-6.625
38TB15F	7.282-7.391	6.985-7.063
38TB16F	7.719-7.828	7.422-7.500
38TB17F	8.157-8.266	7.860-7.938
38TB18F	8.594-8.703	8.297-8.375
38TB19F	9.079-9.156	8.750-8.828
38TB20F	9.517-9.594	9.188-9.266
38TB21F	9.954-10.031	9.625-9.703
38TB22F	10.392-10.469	10.063-10.141
38TB23F	10.829-10.906	10.500-10.578