

Data sheet

750-819

LONWORKS PROGRAMMABLE FIELDBUS COUPLER 78 kbps CARRIER RAIL DIN 35 CAGE CLAMP CONNECTION



Technical data

Package size 1 piece.

No. of nodes	64 without repeater 127 with repeater
Transmission medium	Twisted pair - FTT
Max. length of fieldbus segment	500 m (Free topology) 2700 m (Bus-topology)
Topology	acc. LON - specification
Data transmission rate (kbps)	78 kbps
Buscoupler connection	2 pole male connector, series 231 (MCS) female connector (231-302) is included
Programming	WAGO-I/O-PRO 32
IEC 61131-3	AWL, KOP, PUP, ST, AS
UL 508	E175199, UL 508
Conformity marking	CE
Number of IO modules (per node)	62
Digital signals	max. 248 (in- and output)
Analog signals	max. 124 (in- and output)
Configuration	via PC with LON-Interface
Program memory	128 kByte
Data memory	64 kByte
Non-volatile memory (retain)	7 kByte
Voltage supply	DC 24 V (-15% / + 20%)
Input current (max)	500 mA
Efficiency of the power supply	87 %
Internal current consumption	300 mA
Total current for the I/O modules	1700 mA

Data sheet

750-819

LONWORKS PROGRAMMABLE FIELD BUS COUPLER 78 kbps CARRIER RAIL DIN 35 CAGE CLAMP CONNECTION

Isolation	500 V system / supply
Voltage via power jumper contacts (max)	DC 24 V (-15% / + 20%)
Current via power jumper contacts (max)	DC 10 A
Transceiver	FTT 10 A
Operating temperature	0 °C ... + 55 °C
Storage temperature	-25 °C ... +85 °C
Relative air humidity	95 %
Vibration resistance	acc. IEC 60068-2-6
Shock resistance	acc. IEC 60068-2-27
Degree of protection	IP 20
EMC immunity to interference	acc. EN 50082-2 (96)
EMC emission of interference	per EN 50081-1 (93)
Cross section from [mm ²]	0.08 mm ²
Cross section to [mm ²]	2.5 mm ²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	14 AWG
Weight	205 g
Color	light gray
Height	65 mm
Height	2.56 in
Width	51 mm
Width	2.008 in
Depth	100 mm
Depth	3.937 in
Strip length from	8 mm
Strip length to	9 mm
Strip length	0.33 in
Manuals	

Data sheet

750-819

**LONWORKS PROGRAMMABLE FIELDBUS COUPLER 78 kbps
CARRIER RAIL DIN 35 CAGE CLAMP CONNECTION**

Approval	Voltage	Current	Approval number	Notes
cULus	24		E175199	

Data sheet

750-819

LONWORKS PROGRAMMABLE FIELD BUS COUPLER 78 kbps CARRIER RAIL DIN 35 CAGE CLAMP CONNECTION

Accessories	Item number
ALUMINUM CARRIER RAIL 35 X 7.5 MM, 1.5 MM / 0.059 IN THICK	210-196
COMMUNICATION CABLE	750-920
COPPER CARRIER RAIL 35 X 15 MM, 2.3 MM / 0.091 IN THICK	210-198
END MODULE CARRIER RAIL DIN 35	750-600
Individual wire jumpers	individual jumper
IP65 ENCLOSURE SHEET STEEL	850-811
IP65 ENCLOSURE SHEET STEEL	850-812
IP65 ENCLOSURE SHEET STEEL	850-813
MARKERS FOR GROUP MARKER CARRIERS MARKER CARD DIN A4 (160 MARKERS)	750-100
MINIATURE WSB QUICK MARKING STRIPS PLAIN	248-501
MINIATURE WSB QUICK MARKING STRIPS PLAIN	248-501/000-002
MINIATURE WSB QUICK MARKING STRIPS PLAIN	248-501/000-005
MINIATURE WSB QUICK MARKING STRIPS PLAIN	248-501/000-006
MINIATURE WSB QUICK MARKING STRIPS PLAIN	248-501/000-007
MINIATURE WSB QUICK MARKING STRIPS PLAIN	248-501/000-012
MINIATURE WSB QUICK MARKING STRIPS PLAIN	248-501/000-017
MINIATURE WSB QUICK MARKING STRIPS PLAIN	248-501/000-023
MINIATURE WSB QUICK MARKING STRIPS PLAIN	248-501/000-024
Open individual wire jumpers ends	individual jumper open end
POWER SUPPLY PASSIVE	750-613
POWER SUPPLY UNIT PRIMARY TRIGGERED	787-903
POWER SUPPLY UNIT PRIMARY TRIGGERED	787-904
POWER SUPPLY UNIT PRIMARY TRIGGERED	787-912
PROFINET IO FIELD BUS COUPLER 100 Mbit	750-340
PROFINET PROGRAMMABLE FIELD BUS CONTROLLER 100 Mbit	750-840
RAIL-MOUNTED MODULES - POWER SUPPLY UNITS WITH UNIVERSAL MOUNTING CARRIER	288-808
RAIL-MOUNTED MODULES - POWER SUPPLY UNITS WITH UNIVERSAL MOUNTING CARRIER	288-809
RAIL-MOUNTED MODULES - POWER SUPPLY UNITS WITH UNIVERSAL MOUNTING CARRIER	288-810
RAIL-MOUNTED MODULES - POWER SUPPLY UNITS WITH UNIVERSAL MOUNTING CARRIER	288-812
RAIL-MOUNTED MODULES - POWER SUPPLY UNITS WITH UNIVERSAL MOUNTING CARRIER	288-813
RAIL-MOUNTED MODULES - POWER SUPPLY UNITS WITH UNIVERSAL MOUNTING CARRIER	288-814
RAIL-MOUNTED MODULES - POWER SUPPLY UNITS WITH UNIVERSAL MOUNTING CARRIER	288-815
SCREWDRIVER Type 1, bar (2,5 x 0,4) mm	210-119

Data sheet

750-819



LONWORKS PROGRAMMABLE FIELD BUS COUPLER 78 kbps CARRIER RAIL DIN 35 CAGE CLAMP CONNECTION

SCREWDRIVER Type 2, bar (3,5 x 0,5) mm	210-120
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 1, bar (2,5 x 0,4) mm	210-619
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm	210-620
SCREWLESS END STOP 10 MM / 0.394 IN WIDE	249-117
SCREWLESS END STOP 6 MM / 0.236 IN WIDE	249-116
SHIELD CLAMPING SADDLE 11 MM / 0.433 IN WIDE	790-108
SHIELD CLAMPING SADDLE 19 MM / 0.741 IN WIDE	790-116
SHIELD CLAMPING SADDLE 27 MM / 1.053 IN WIDE	790-124
SHIELD CLAMPING SADDLE 43 MM / 1.677 IN WIDE	790-140
STEEL CARRIER RAIL 35 X 15 MM, 1.5 MM / 0.059 IN THICK	210-114
STEEL CARRIER RAIL 35 X 15 MM, 1.5 MM / 0.059 IN THICK	210-197
STEEL CARRIER RAIL 35 X 15 MM, 1.5 MM / 0.059 IN THICK	210-506
STEEL CARRIER RAIL 35 X 15 MM, 1.5 MM / 0.059 IN THICK	210-508
STEEL CARRIER RAIL 35 X 15 MM, 2.3 MM / 0.091 IN THICK	210-118
STEEL CARRIER RAIL 35 X 15 MM, 2.3 MM / 0.091 IN THICK	210-548
STEEL CARRIER RAIL 35 X 7.5 MM, 1 MM / 0.039 IN THICK	210-112
STEEL CARRIER RAIL 35 X 7.5 MM, 1 MM / 0.039 IN THICK	210-113
STEEL CARRIER RAIL 35 X 7.5 MM, 1 MM / 0.039 IN THICK	210-504
STEEL CARRIER RAIL 35 X 7.5 MM, 1 MM / 0.039 IN THICK	210-505
STEEL IP65 ENCLOSURES 10/100 Mbit/s	750-841/025-000
STEPPER MODULE FOR THE WAGO-I/O-SYSTEM 750	750-670
STÜTZELKO-MODUL SMOOTHES UNSTABLE DC 24 V POWER SUPPLIES	288-824
WAGO RADIO ADAPTER	750-921

Data sheet

750-819

LONWORKS PROGRAMMABLE FIELDBUS COUPLER 78 kbps CARRIER RAIL DIN 35 CAGE CLAMP CONNECTION

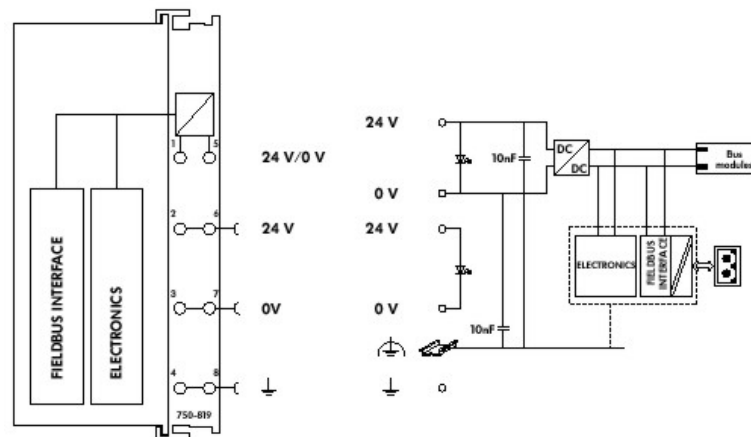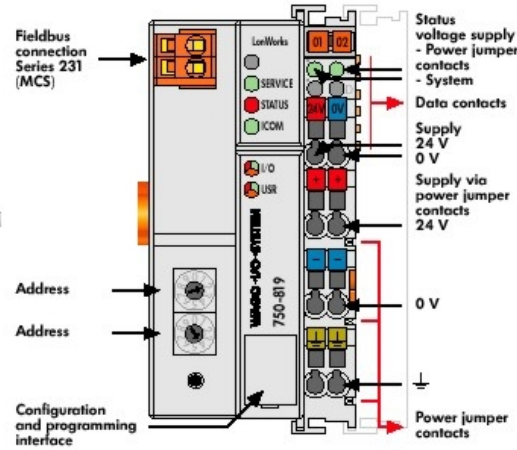

Data sheet

750-819

LONWORKS PROGRAMMABLE FIELD BUS COUPLER 78 kbps CARRIER RAIL DIN 35 CAGE CLAMP CONNECTION

The programmable fieldbus controller for LONWORKS is an expansion of the WAGO-I/O-SYSTEM. Programming of the application is done with WAGO-I/O-PRO 32 in accordance with IEC 61131-3. The programmer can access all fieldbus and I/O data.

Features and operation:

In addition to the Neuron chip the LONWORKS Controller has a host processor (40 MHz) that can be programmed with WAGO-I/O-PRO 32.

All available types of modules up to 248 digital or 124 analog inputs/outputs as well as modules with special functions can be addressed and handled using the WAGO-I/O-PRO 32 generated program.

The Neuron chip connection is made through IEC 61131-3 variables with special addresses. With TOPLON® PRIO, that supports the LNS Plug-in standard, these variables can be read and assigned to a maximum of 52 network variables. To each of these network variables any SNVT can be assigned.

The TOPLON® PRIO Plug-in supports all the SNVTs of the LONMARK® SNVT Master List (data length 1-31 bytes). The network variables can be assigned to any SNVT ensuring the best possible interoperability between WAGO LON products and LONMARK products of other manufacturers.

LON®, LONMARK®, J and Echelon® are registered trademarks of Echelon Corporation
LNS™ is a trademark of Echelon Corporation
TOPLON® is a registered trademark of WAGO Kontakttechnik GmbH

Data sheet

750-819

**LONWORKS PROGRAMMABLE FIELDBUS COUPLER 78 kbps
CARRIER RAIL DIN 35 CAGE CLAMP CONNECTION**
